
1.1

CoreClad Window Head detail Direct Fixed

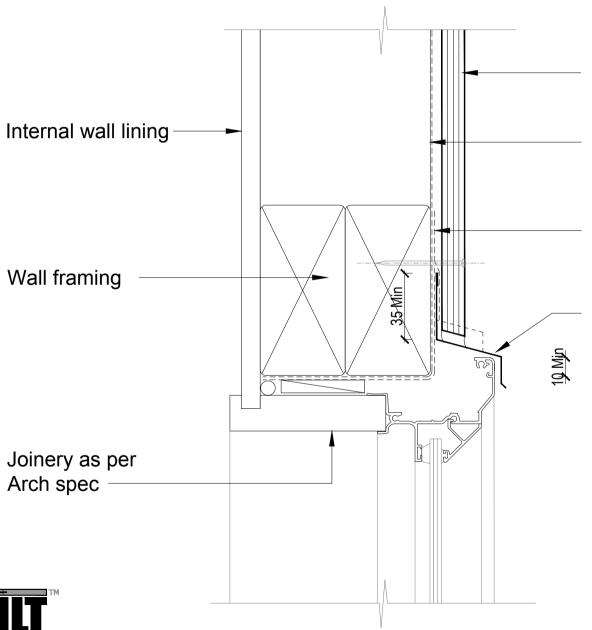

IBuilt™ 12mm H3.2 CoreClad cladding

Building underlay to E2/AS1

Layer of flexible flashing tape over flashing upstand

Stainless Steel/PVC head flashing with 15° min slope. Apply 50mm strip of sealant at both ends of flashing.

Note: For very high and extra high wind zones use sealant between joinery flange and head flashing as per Fig 71 E2/AS1

